

FIG.1



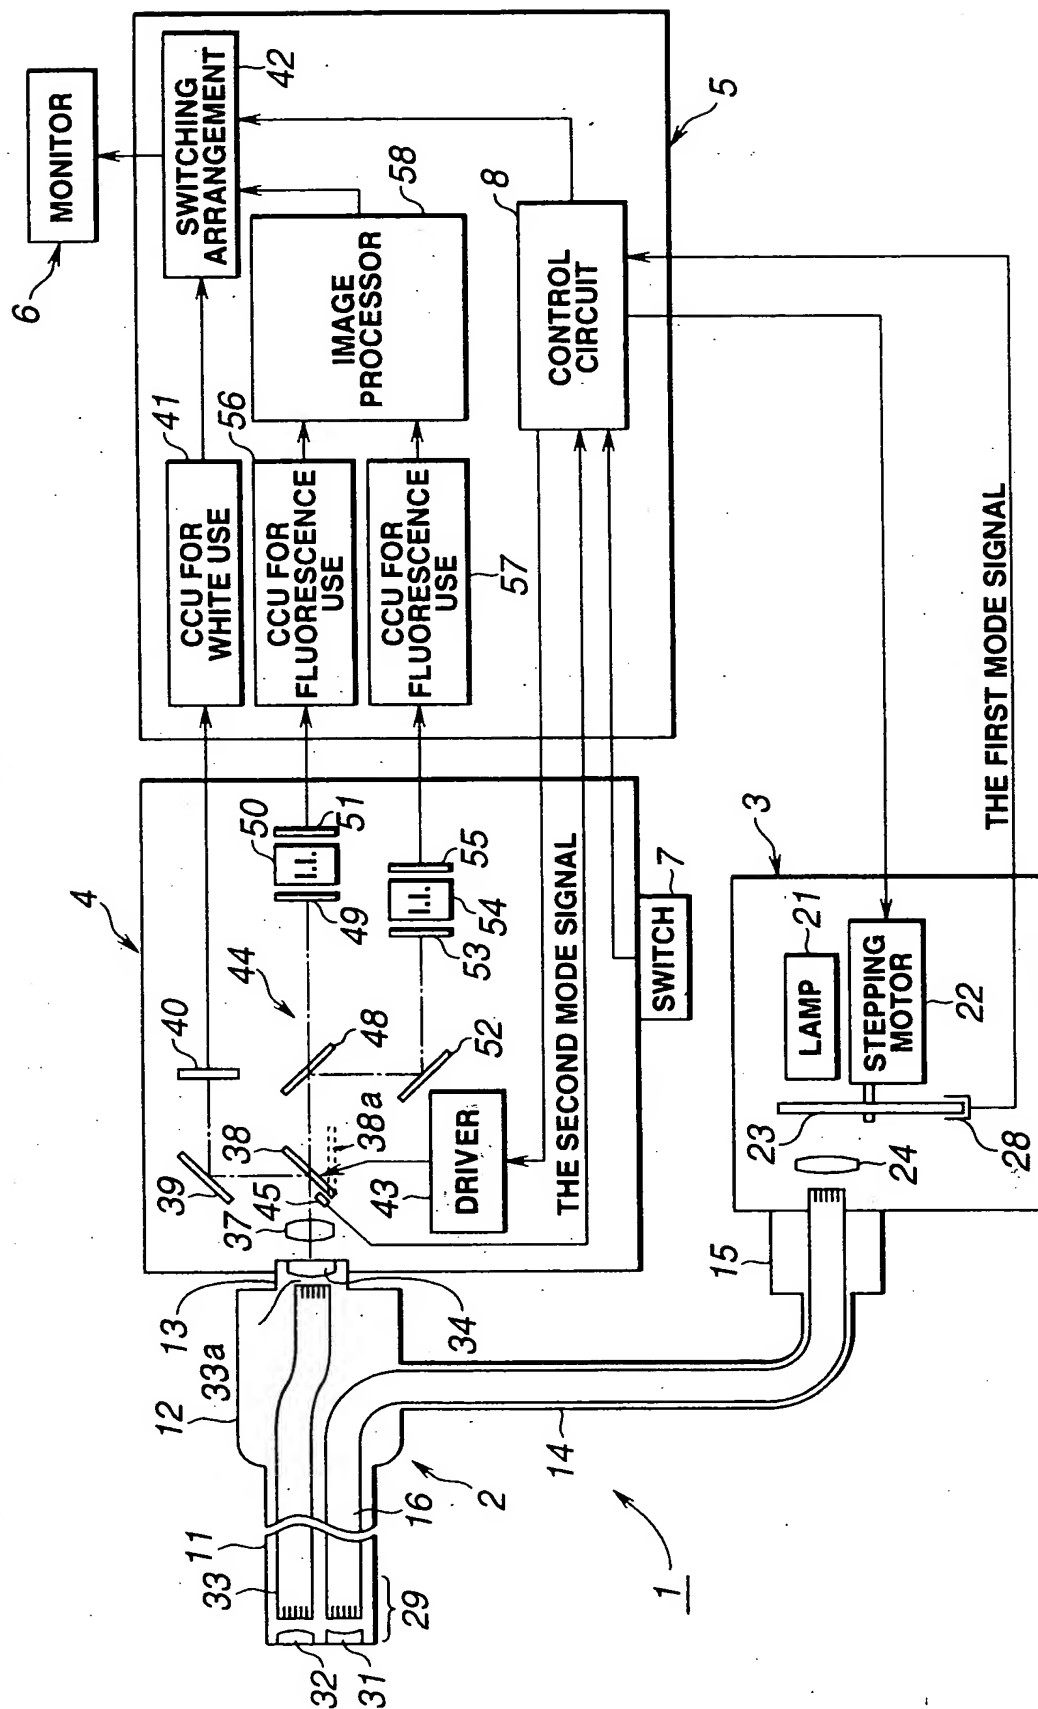


FIG. 2

**FIG.2**

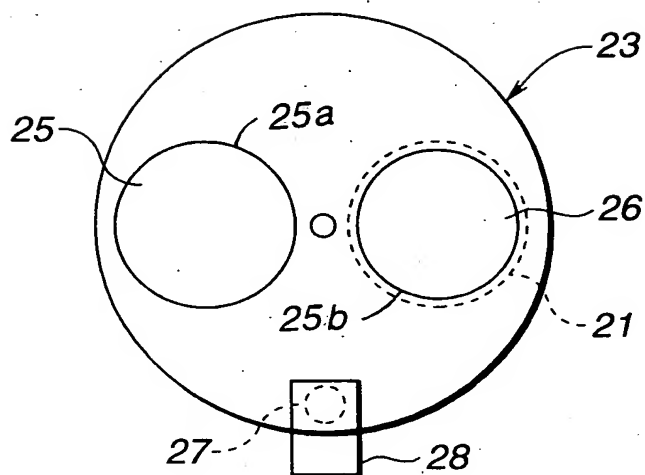

**FIG.3**

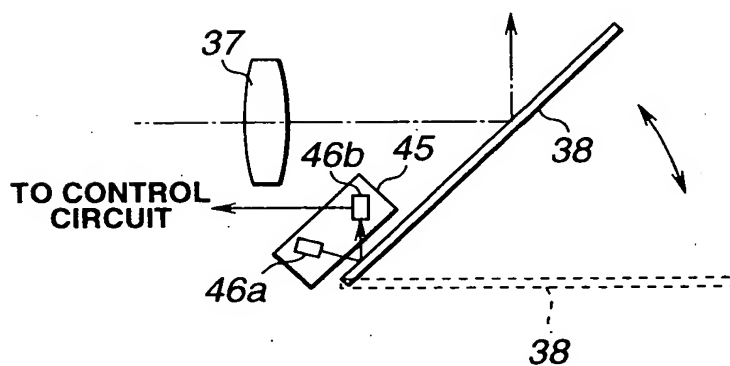


10045979.014002  
200710 62654001


**FIG.4**

SWITCHING CONDITION OF EACH DEVICE		CAMERA CONDITION
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	INOPERATIVE
ON	OFF	INOPERATIVE
OFF	ON	WHITE LIGHT MODE
ON	ON	WHITE LIGHT MODE
ON (PHOTOCOUPLER)- (PHOTOCOUPLER)+	ON	WHITE LIGHT MODE
		FLUORESCENCE MODE


FIG.5

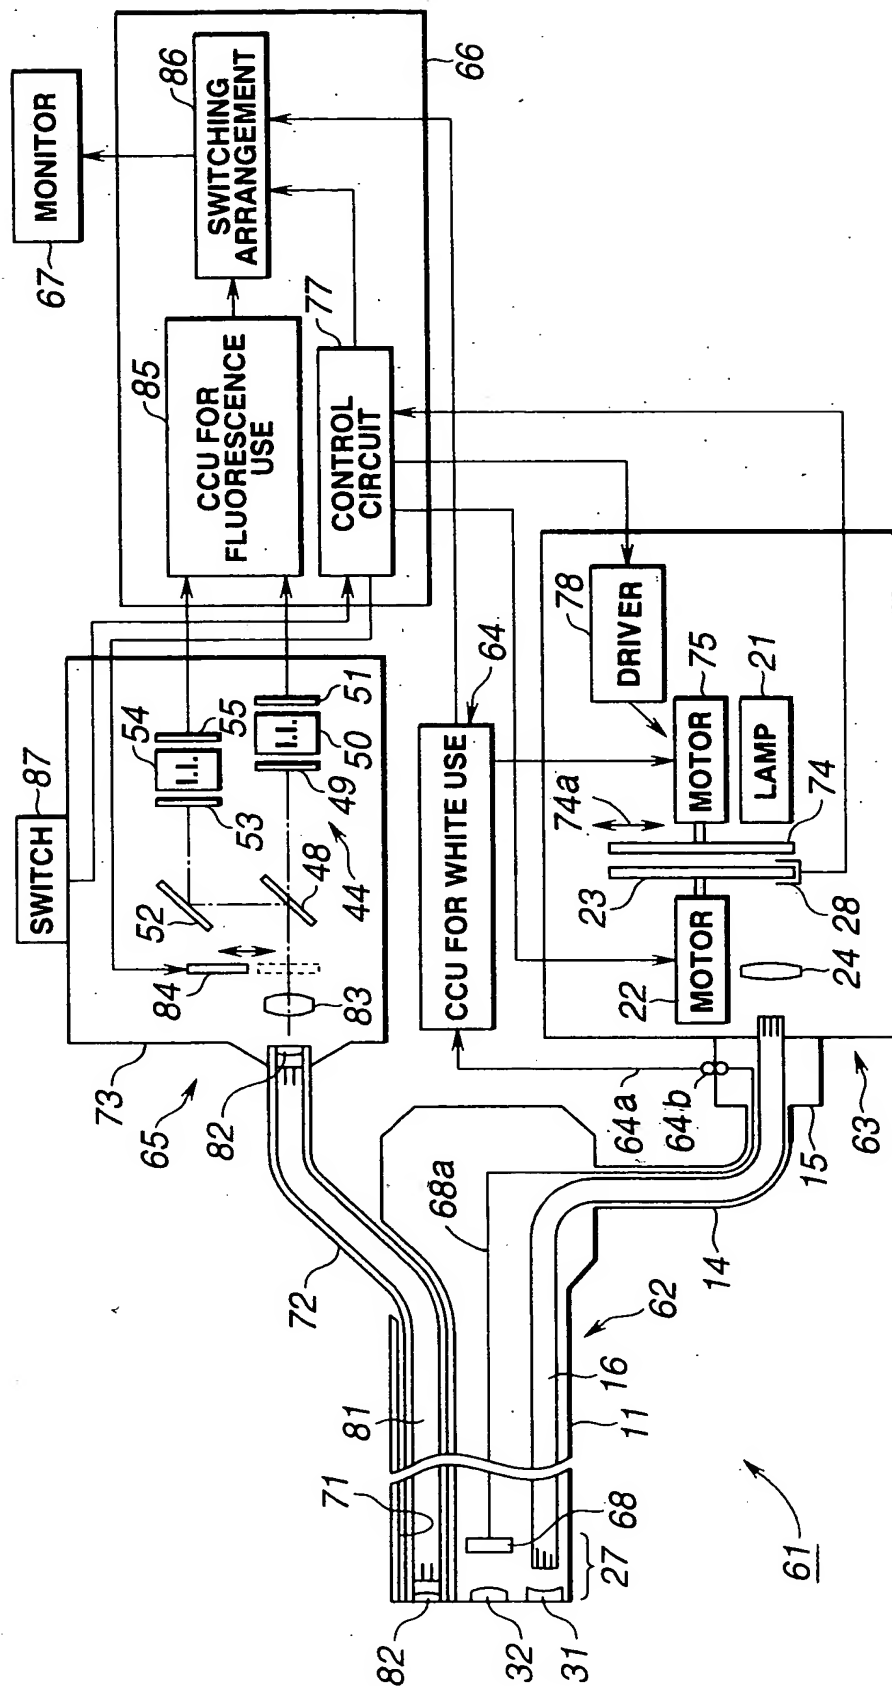

**FIG.6**

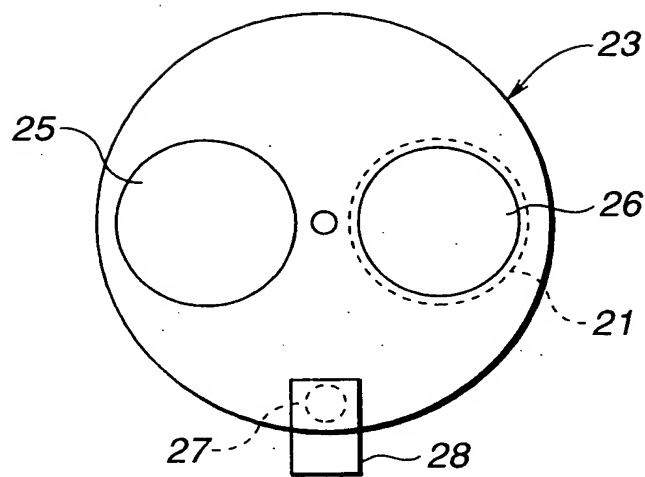

**FIG.7**

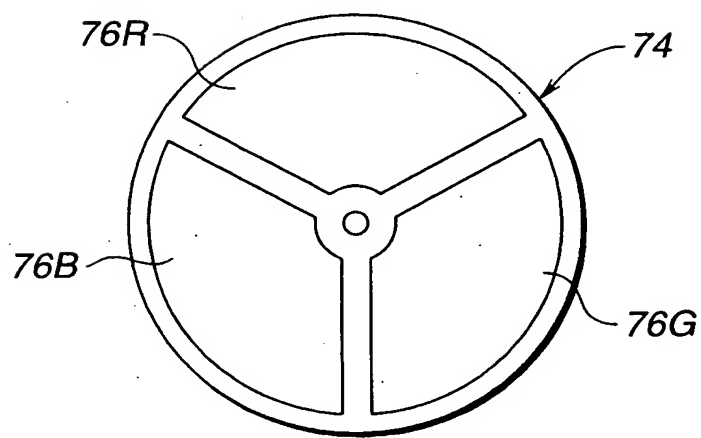

20041016254001

FIG.8

SWITCHING CONDITION OF EACH DEVICE		CAMERA SHUTTER
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	CLOSED
ON	OFF	CLOSED
OFF	ON	CLOSED
ON	ON	CLOSED
ON (PHOTOCOUPLER)- (PHOTOCOUPLER)+	ON	CLOSED
		OPEN

FIG.9



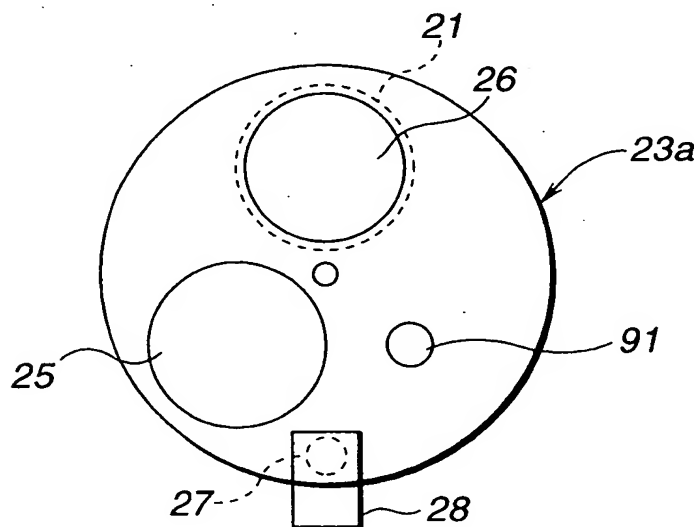


FIG. 10




# FIG.11

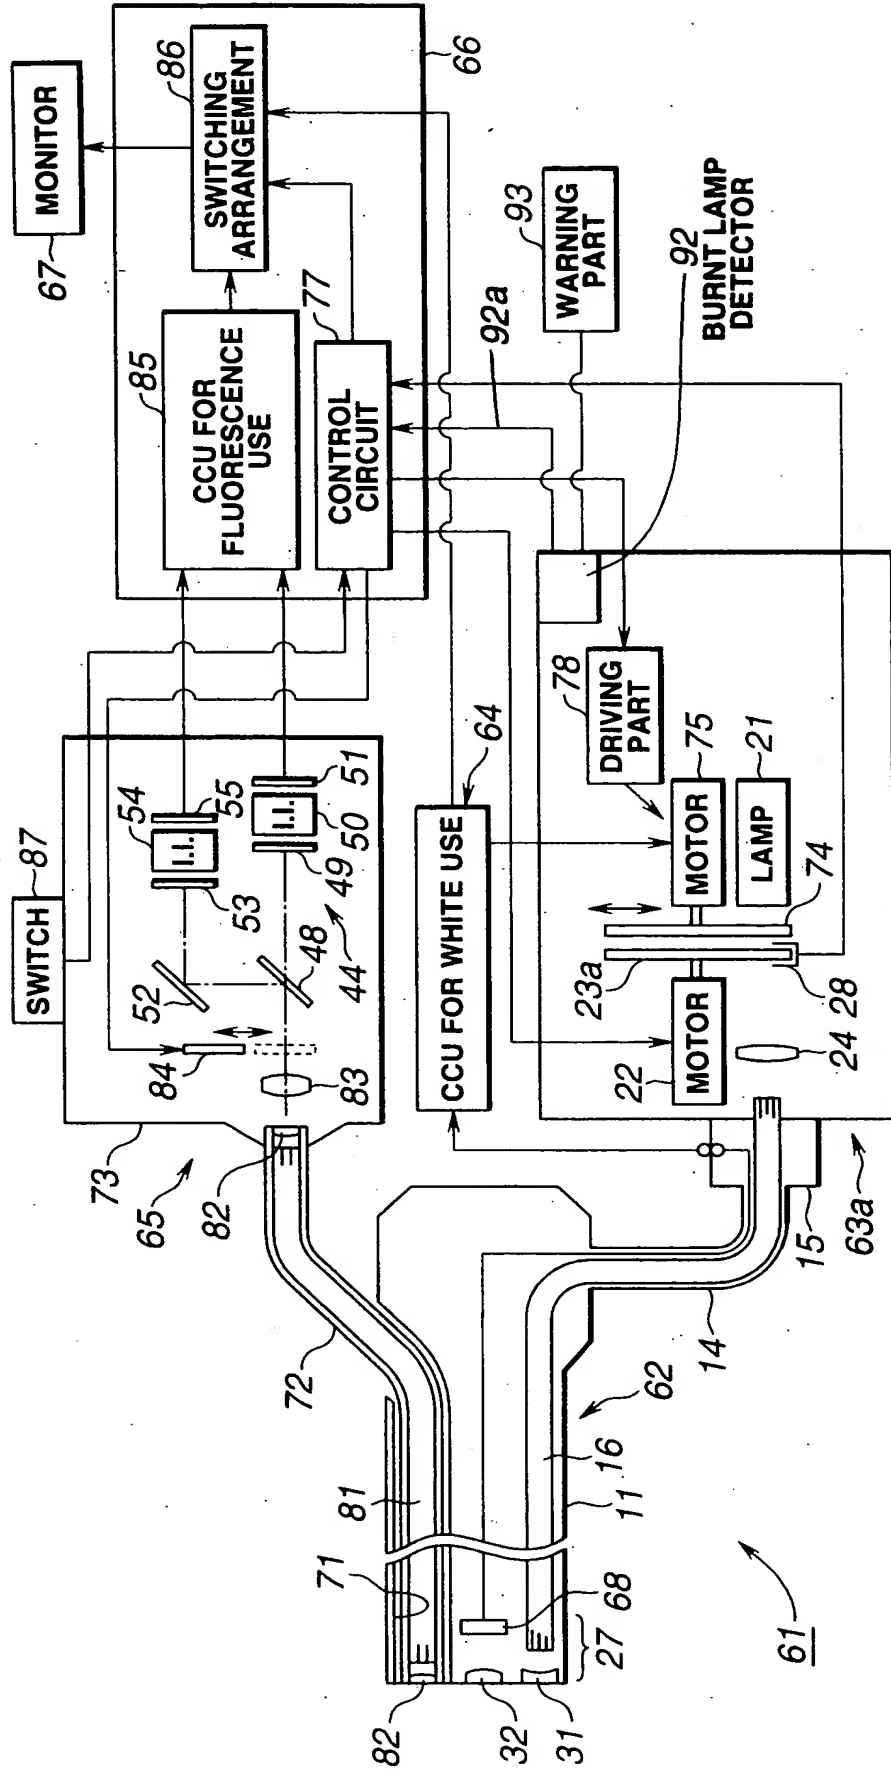

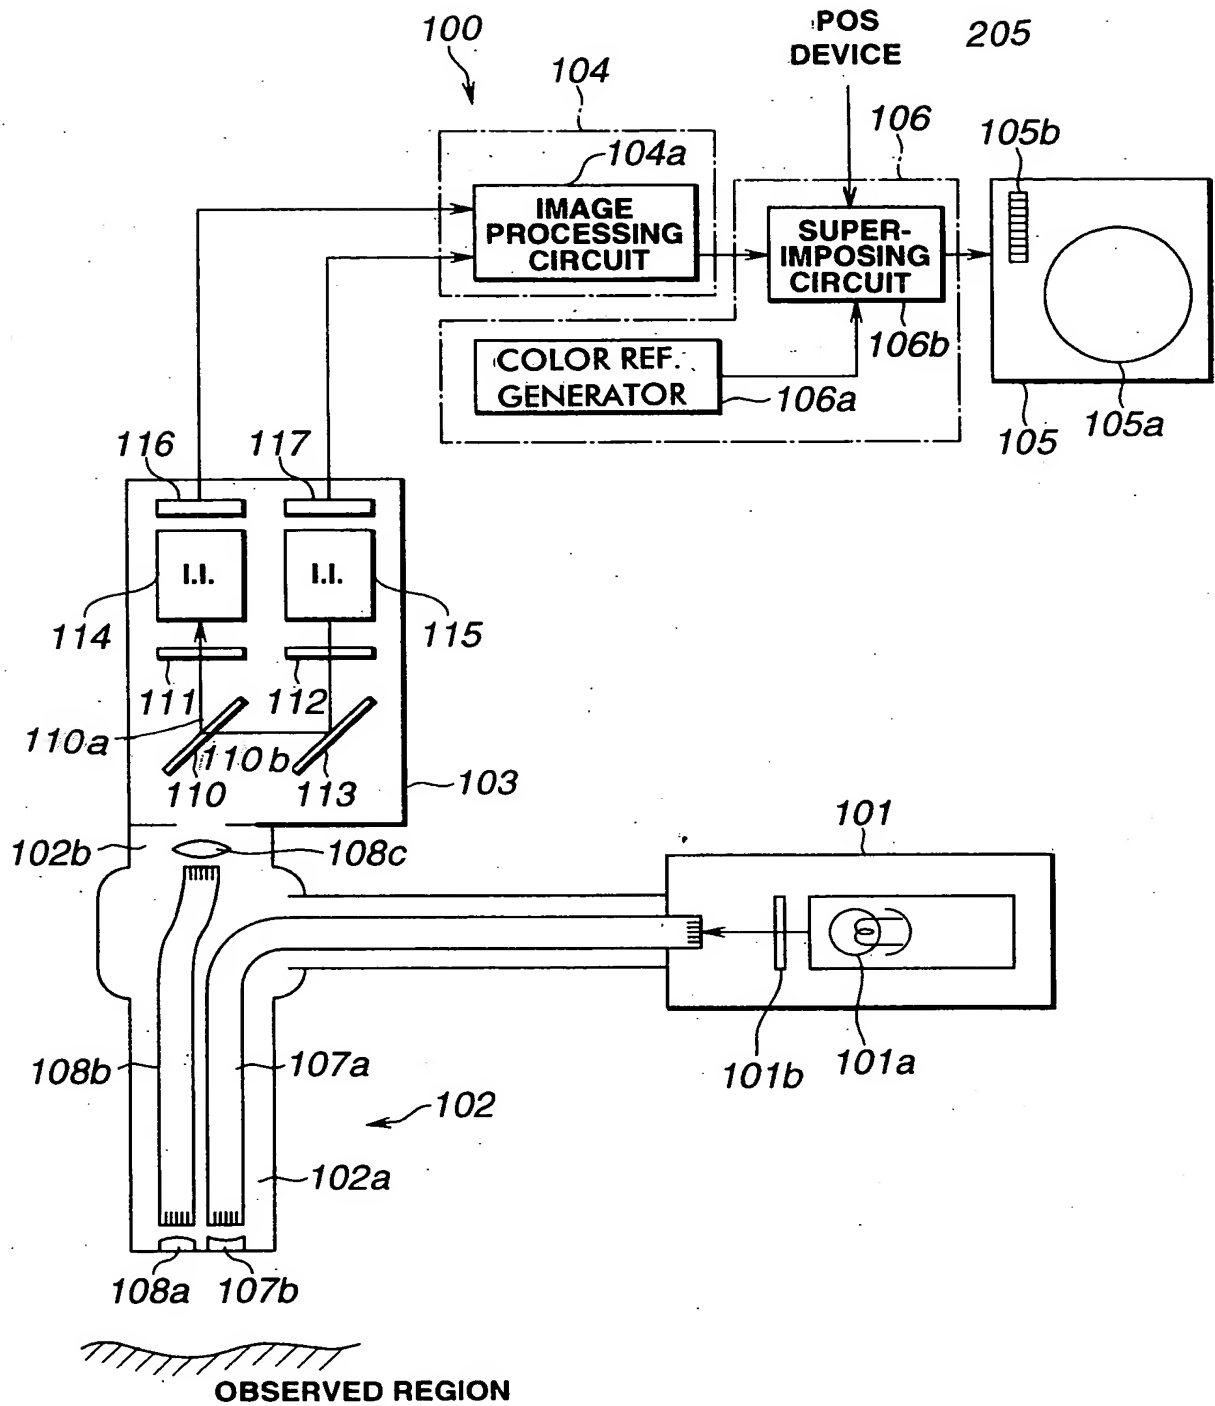

10045979.0400  
200710 62654607

FIG.12

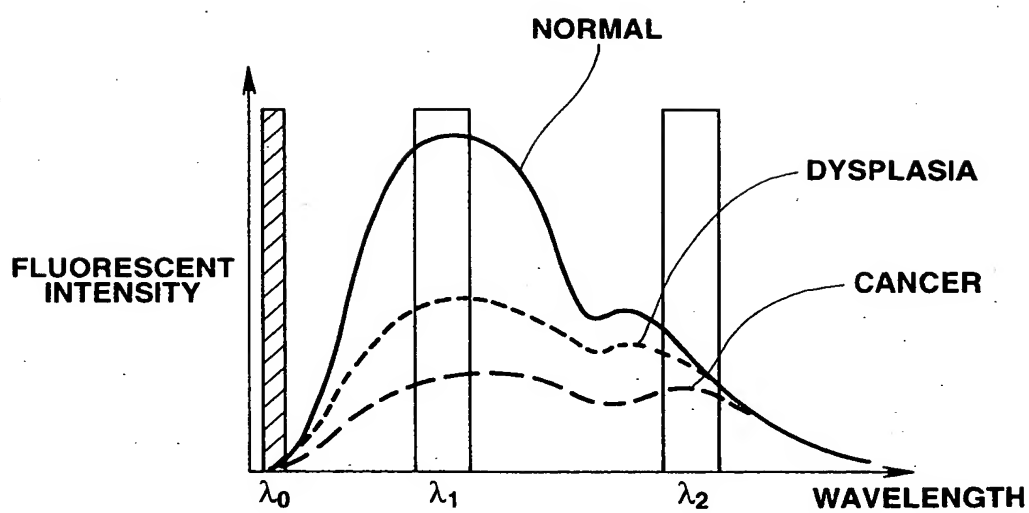

2007-10-24 09:00

FIG.13



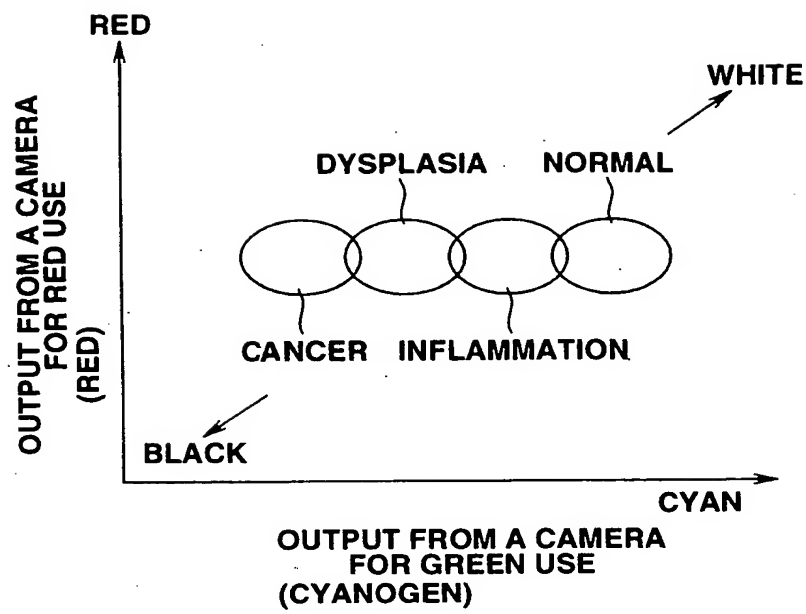


FIG.14

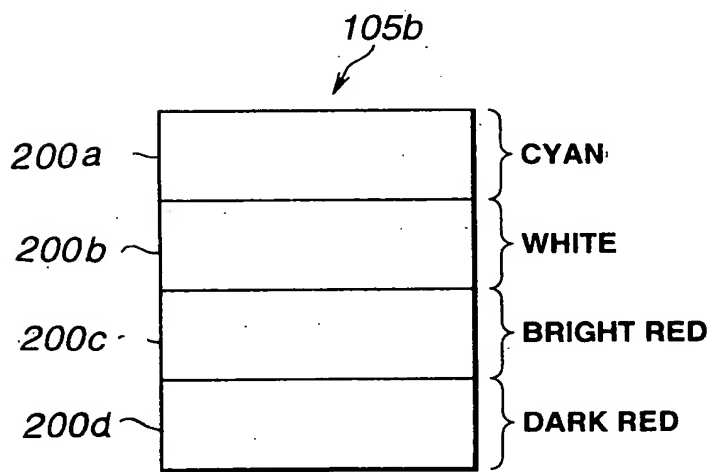


# FIG.15

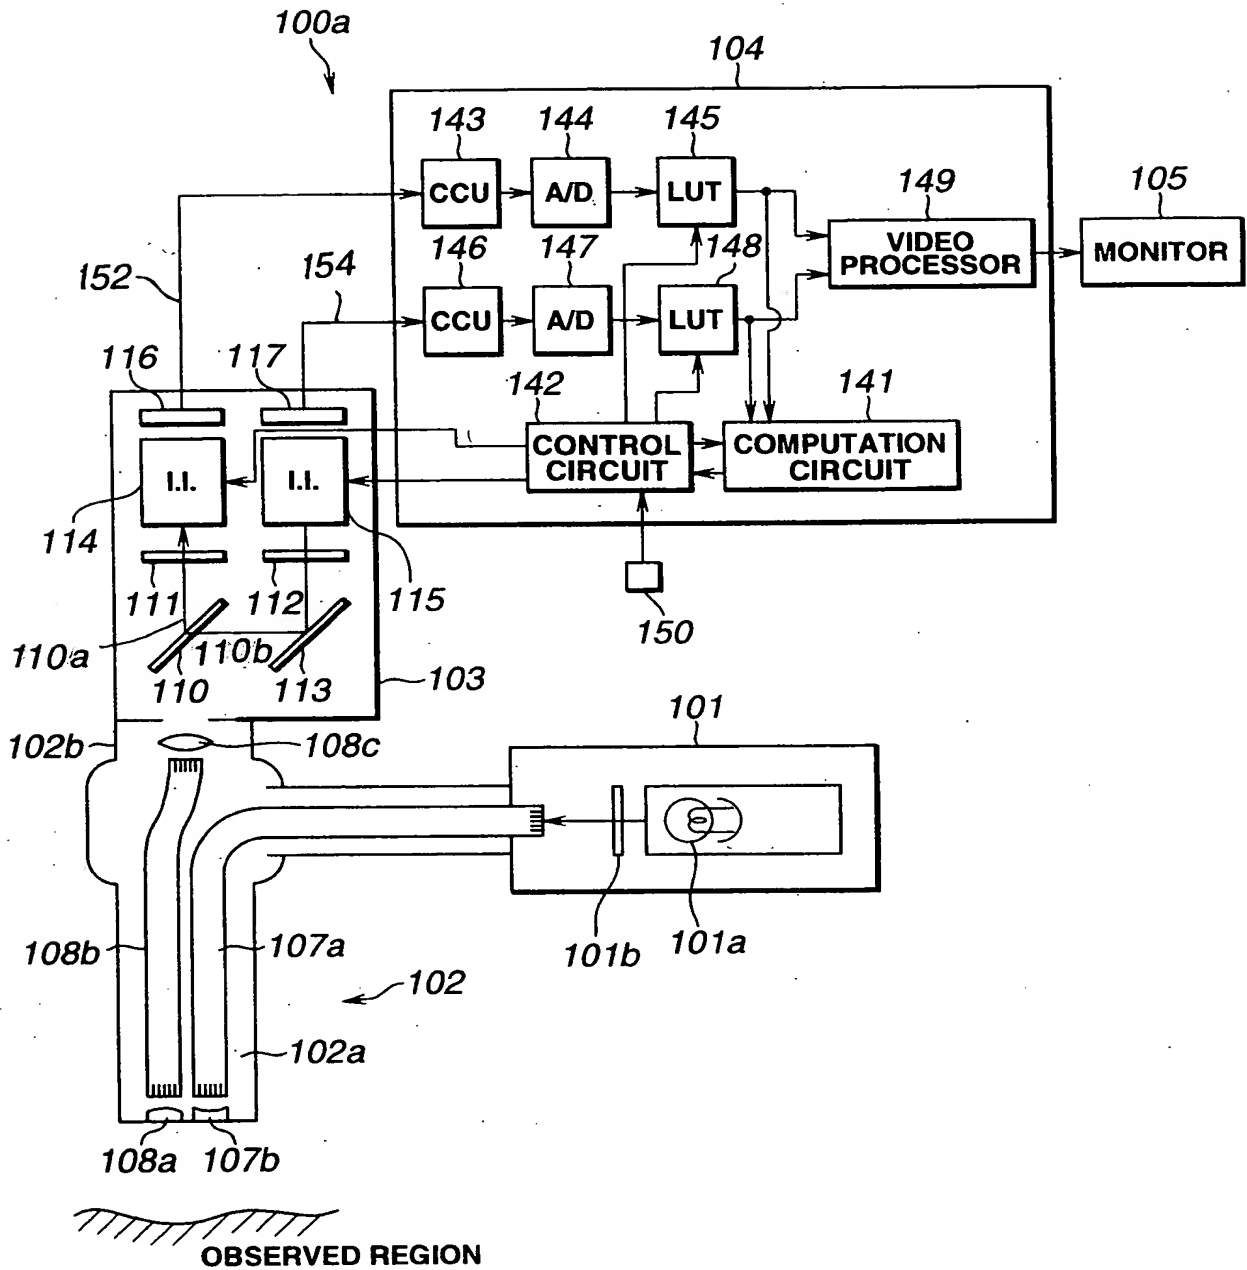

1004979.041001  
200710 62654001

**FIG.16A**

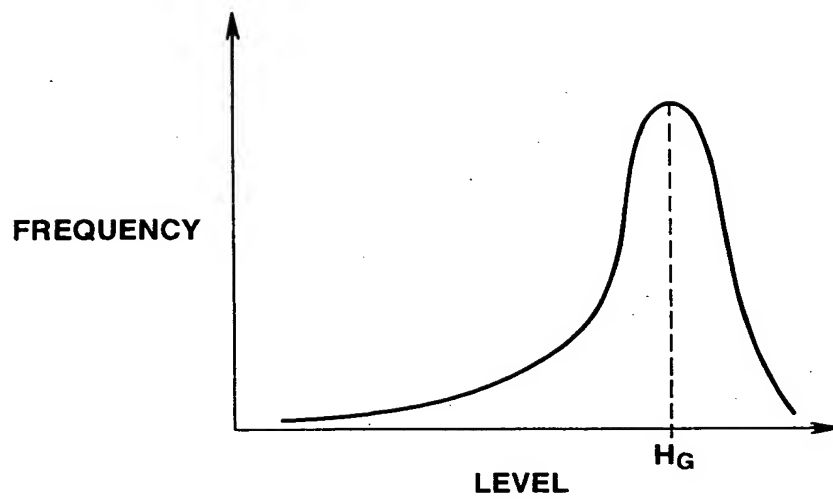

**FIG.16B**



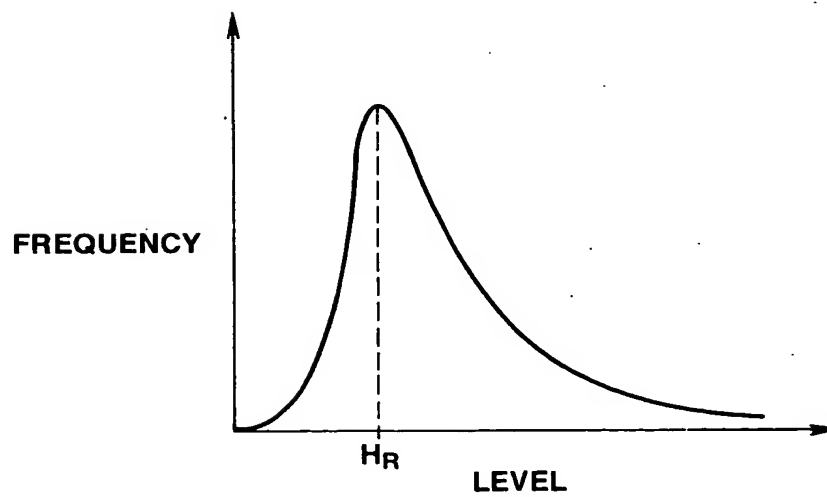


FIG.17

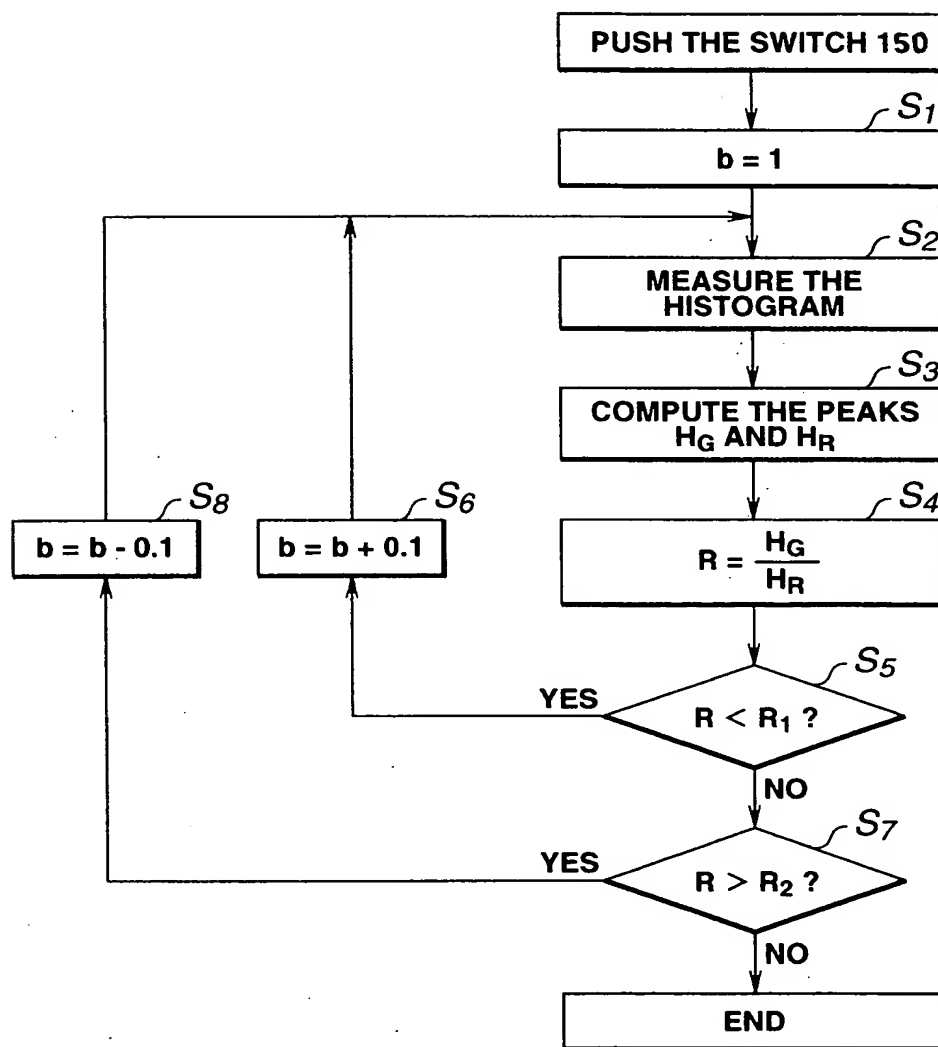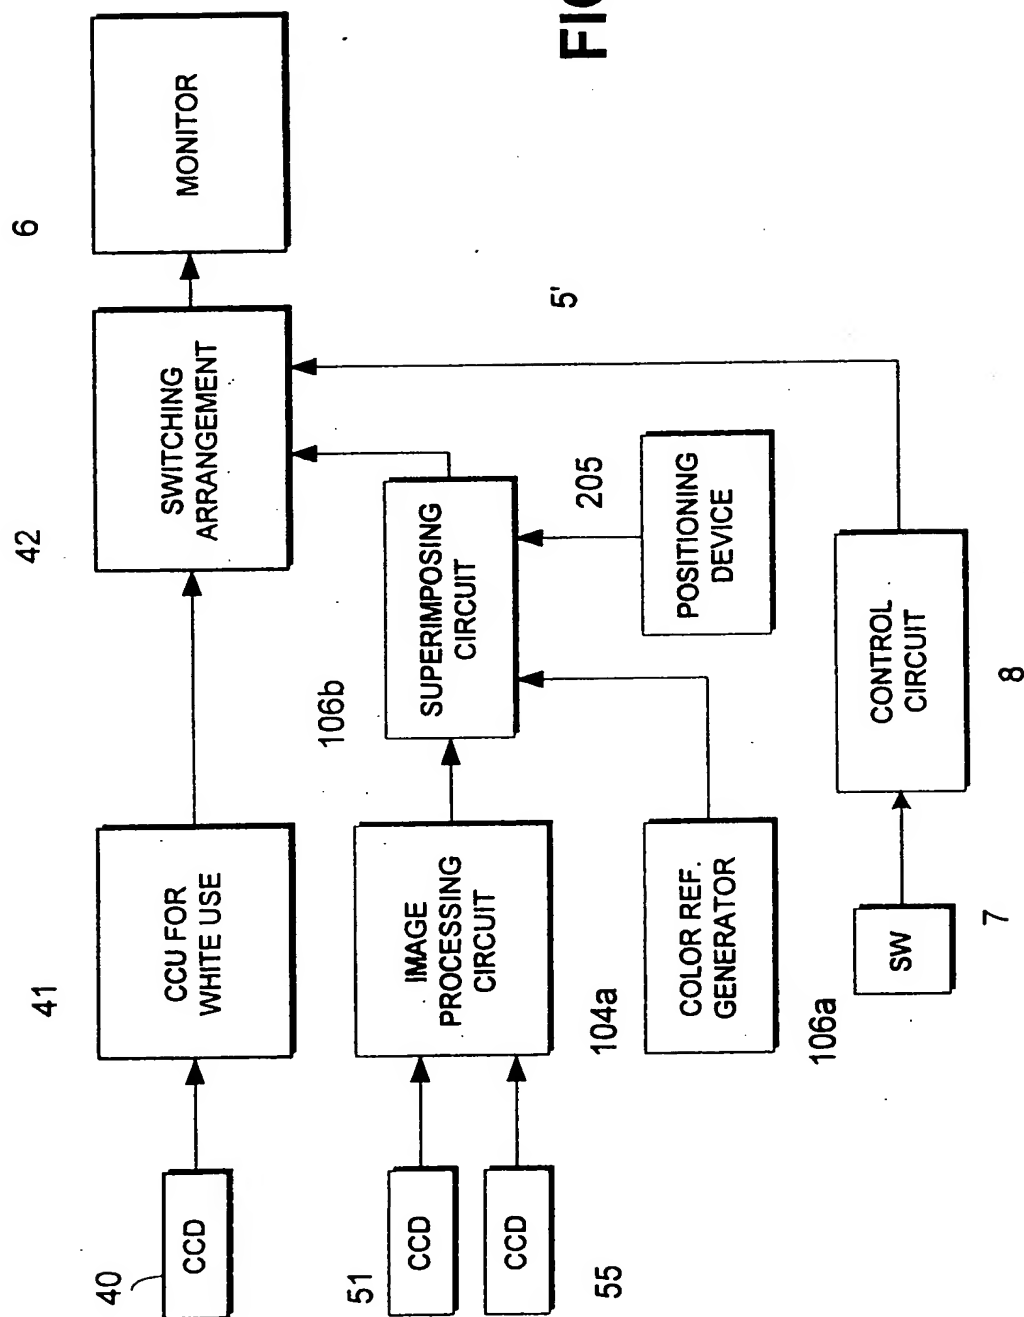

2001-10-06 09:40:00

[illegible]

**FIG. 18**

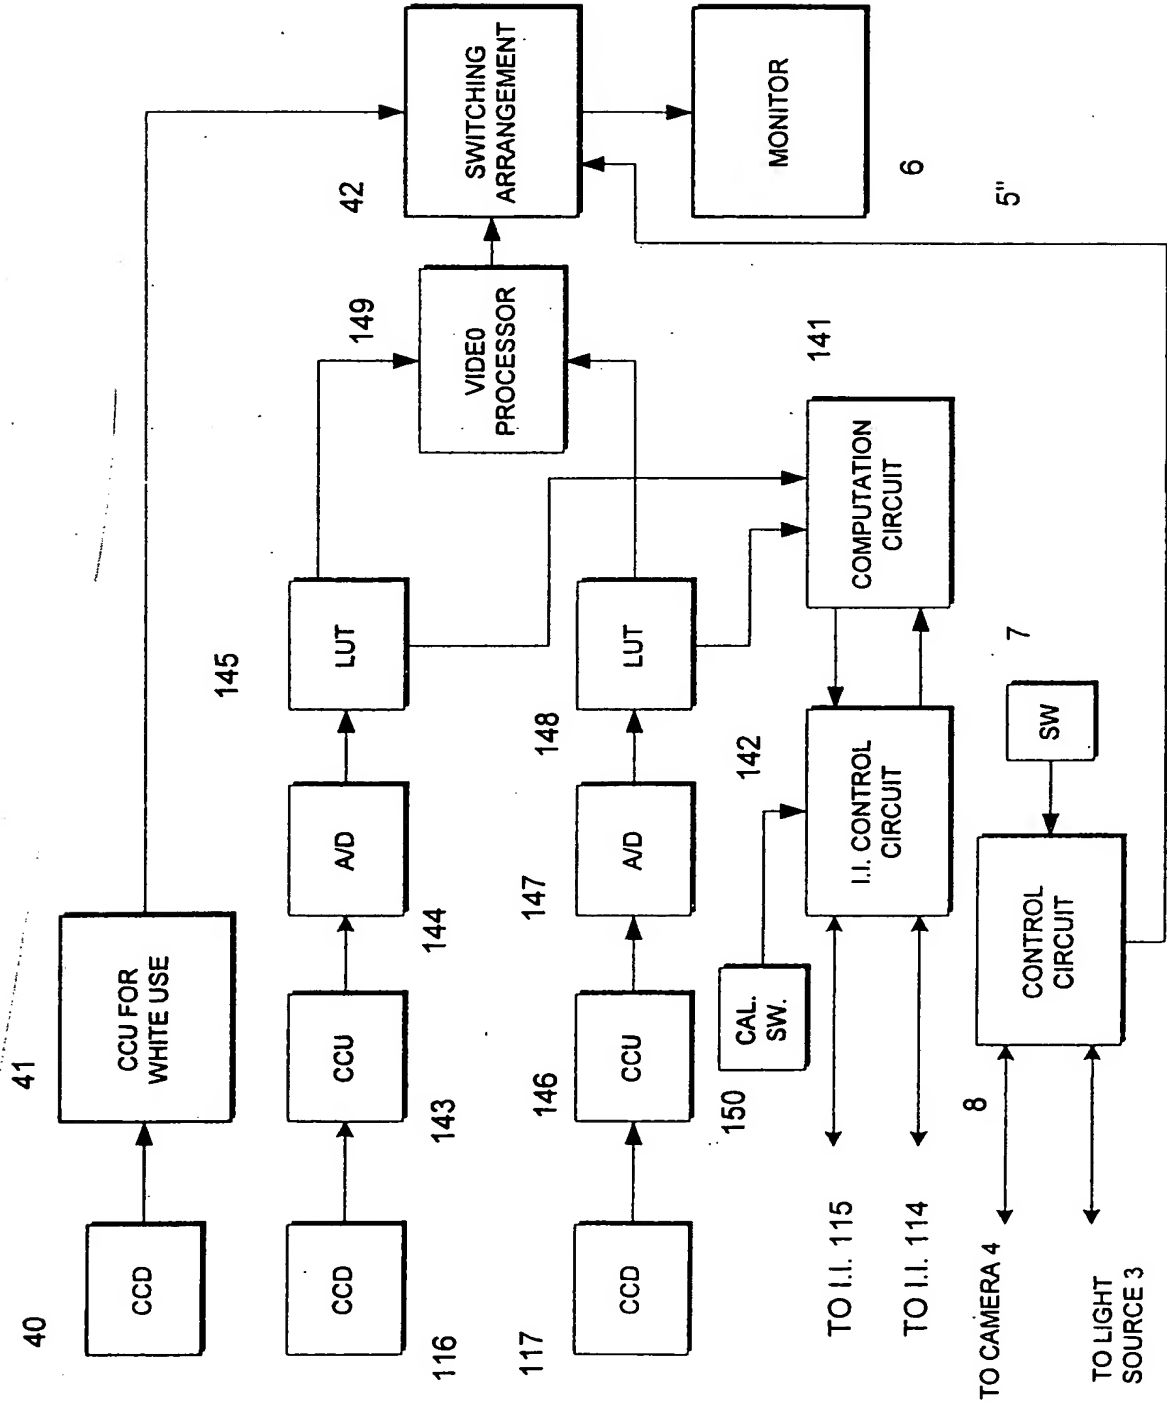


FIG. 19